

Highlights

- Polypropylene or PVDF : great resistance to acids and alkalines
- Intank assembly : no risks of leaks outside the bath
- Out of tank assembly : space gained in the tank



Technical features


Materials		PP - PVDF
Max temperature	PP	80°C
	PVDF	110°C
Filtration rate		0,2 -> 100 µm
Pumps		ST 50 - ST52
Flowrates		0,2 à 3 m³/h
Connections		Threaded, union nut, grooved nozzle, flanges

Filtration media



1 Wound cartridges 3 x 10"

Flowrate charts

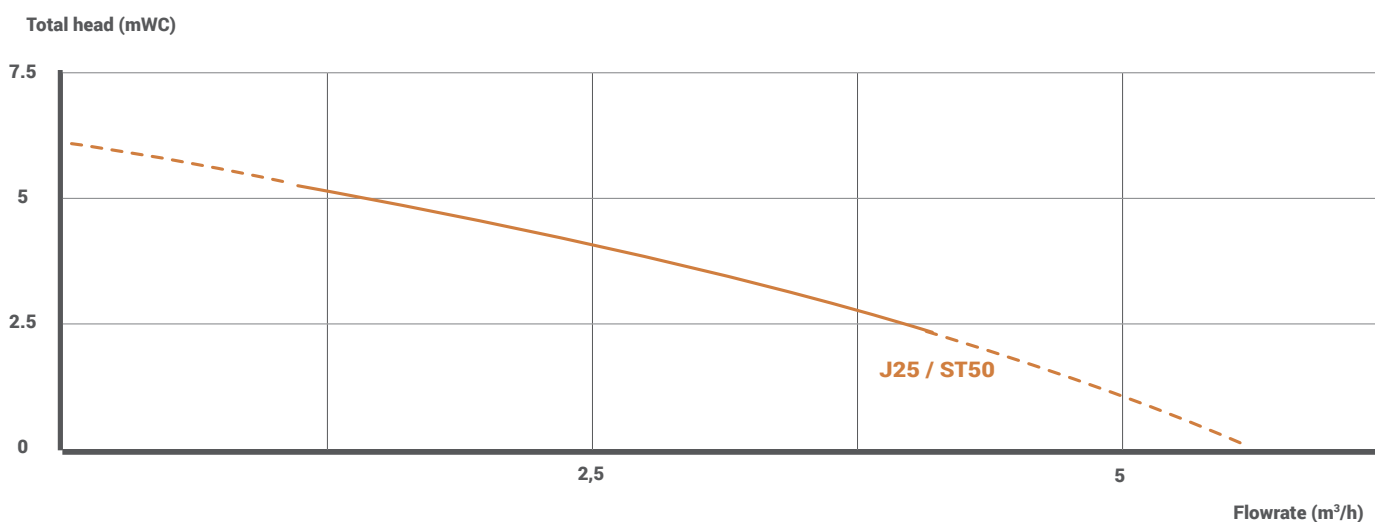

Dimensions

